




## Tightening of the Cable gland

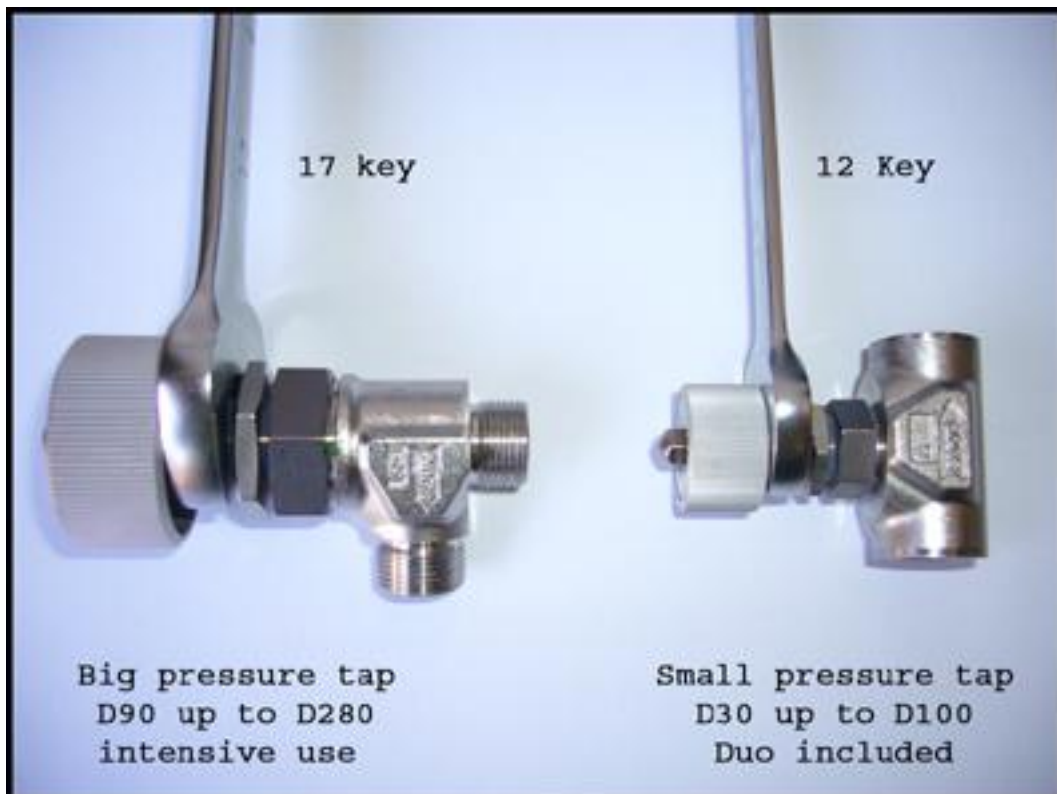

If you have a flat thin key, you can :

Tighten the nut of the cable gland up which is just behind the regulating wheel.

If your key is too thick, please unscrew the little nut holding the regulating wheel in place, tighten the cable gland up, put a little grease on the axle, replace the regulating wheel, check the hardness and screw the little nut back again.



- 1°) Fixing nut of the regulating wheel
- 2°) decorative washer
- 3°) Regulating valve
- 4°) Cable nut gland
- 5°) Cable gland seal
- 6°) Cable gland washer
- 7°) Regulating body with its fixing nut